


CONIFLOOR IEC AS

(Industrial Epoxy Chemical Resistant Anti-Static)

Hard, low-emission floor coating based on epoxy resin, chemically highly resistant, static crack bridging and mechanically medium-heavy load, for ATEX-areas according to EN 1081 and EN 61340-4-1 for indoor use

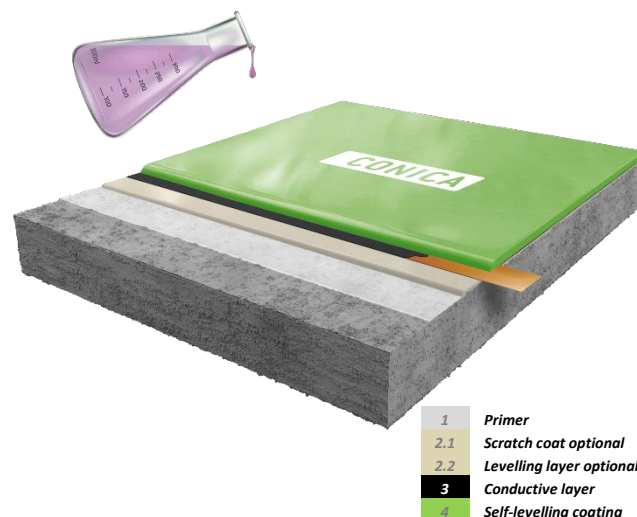

System design and consumption

	LAYER	PRODUCT	CONSUMPTION (kg/m ²)	QS / FILLER (kg/m ²)	APPLICATION
1	Primer on strongly absorbent u. porous substrates, if necessary, 2-layer application *	CONIFLOOR EP 110 N / CONIFLOOR EP 115 N / or others	0.3 – 0.5 * 2-layers if necessary or scratch coat	QS 03/08 0.8 – 1.0	Squeegee / roller / brush Sand broadcasting, not in excess
2.1	Scratch coat / levelling (optional)	CONIFLOOR EP 110 N / CONIFLOOR EP 115 N / or others filled with QS 01/03	0.6 – 1.0 QS 01/03 MR ≤ 1:1	QS 03/08 2.0 – 3.0	Trowel / smoothing rake / notched trowel or squeegee Sand broadcasting, not in excess
2.2	Pore sealer / levelling layer (optional / alternative)	CONIFLOOR EP 455 CR	0.8 – 1.0	none	Trowel / smoothing rake / notched trowel or rake
3	Conductive layer with copper tape for earth points	CONIFLOOR EP 150 AS incl. copper tape for earth points	0.1 – 0.12	none	Earthing copper tape on scratch coat (grinded) below the conductive layer, measure conductive layer before applying next coating!
4	Hard self-levelling coating, chemically highly resistant, statically crack bridging, conductive	CONIFLOOR EP 455 CR AS	2.5 – 3.0	optional broadcasting with SIC for higher slip resistance (see test report)	Notched rubber squeegee / notched rubber rake on conductive layer, spike roller with conductive coatings mandatory!
	System layer thickness	ca. 2.0 – 3.0 mm			
	Subsoil	Surfaces must be clean, stable, and free of cracks and voids. In general, substrates must be provided in accordance with the applicable regulations. (See also "General processing guidelines for CONICA coatings, CONICA seals and CONICA parking deck coating systems"). Adhesive tensile strength ≥ 1.5 N / mm ² , max. Residual moisture ≤ 4% -CM, on cementitious substrates. Special precautions must be taken in the event of higher residual moisture levels and moisture by rising water. Preparation of the surface e.g., by grinding (diamond) or shot blasting (Blastrac) with subsequent sweeping and vacuuming is mandatory. The above-mentioned consumption values have been determined in the laboratory under practical conditions to achieve the technical properties. In the case of existing on-site conditions and conditions such as temperature, surface roughness etc., the consumption values may deviate from the stated values. In case of doubt, we recommend creating sample areas on site.			
	Note	For other substrates, which are not mentioned here or special requirements, special primers must be used if necessary, please ask our technical service. Detailed processing instructions can be found in the respective product data sheets or are available on request. CONICA synthetic resins are intended exclusively for commercial use!			

Areas of application

- Production halls with chemical load and ATEX requirements
- Pharmaceutical production areas with ATEX requirements
- Warehouses and high bay warehouses with chemical load and ATEX
- Hospitals (OP, emergency rooms), medical centres, laboratories
- Electronic and automotive industry

System properties

- **Conductive** accord. to EN 1081 and EN 61340-4-1 for ATEX areas
- **Good** colour stability indoor
- **Diverse colours** according to RAL, glossy or matt with topcoat
- **Low emission**
 - Slip resistant surfaces R9 – R10
- **Trafficable** with forklift and pallet trucks and similar
- **Chemically high resistant** (Chemicals on request)
- **Hygienic**, joint and seamless surfaces easy to clean
- **Statically crack bridging up to 0.4 mm**
- Flame retardant class **Bfl-s1**



Technical data (internal / external approvals)

PROPERTIES	STANDARD	VALUES
Crack bridging	DIN EN 1062-7	A2 min. 0.4 mm / 23°C (> 0.25 mm)
Shore-hardness	DIN ISO 868	≤ 78 D after 28 d
Flexural strength	EN 196 / ASTM C109	ca. 44 N/mm ²
Compressive strength	EN 196 / ASTM C109	ca. 59,5 N/mm ²
Chemical resistance	EN ISO 2812-1	DiBT Test liquids 1a, 3c, 4, 4a, 5a, 6a, 7, 7b, 8a, 9, 9a, 10, 11, 12, 13, 14, 15, E85, E10 others on request
Impact strength	DIN EN 13813	≥ 4 Nm (IR4)
Abrasion resistance (Taber)	ISO 9352, ASTM D 1044	≤ 67 mg
Abrasion resistance (BCA)	DIN EN 13813	AR ≤ 0,5
Slip resistance	DGUV Regel 108-003 / DIN 51130	Class R9 / R10* (with topcoat or SIC)
Adhesive strength	DIN ISO 4624	≥ 1,5 N/mm ² (depends on substrate)
Fire classification	EN 13501-1	Bfl-s1
Conductivity	EN 1081 EN 61340-4-1	Rg ≤ 10 ⁶ Ω Rg ≤ 10 ⁹ Ω

CONICA AG
Industriestrasse 26
8207 Schaffhausen/ Swiss
Tel. +41 (0)52 644 36 00
Fax +41 (0)52 644 36 99
info@conica.com
www.conica.com

The content of this information sheet is non-binding. With regard to the variety of surfaces and object conditions on the one hand, and on the other hand due to the fact that the application and processing of this product are beyond our control, the buyer and / or user is not released from the obligation to its own responsibility, to check and ensure, that this product is suitable for the intended use. Our verbal, written advice and tests is non-binding.

With the publication of this issue, all previous information on this system is no longer up to date. Since the data sheets are updated regularly, it is the responsibility of the user to have the current version available. Registered users can download current data sheets from our homepage at any time. We would be happy to send them to you on request.