


CONIFLOOR IPS AS

(Industrial Polyurethane System Anti-Static)

Tough-hard, low-emission, electrostatically conductive floor coating based on aromatic polyurethane resin, statically crack-bridging, mechanically resilient for EX protection areas (ATEX)

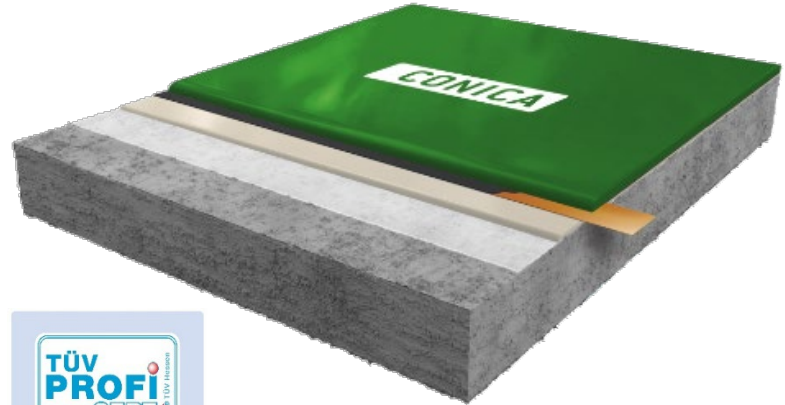

- 1 Primer
- 2.1 Scratch coat optional
- 2.2 Levelling layer recommend
- 3 Conductive layer with copper tape
- 4 Conductive coating tough hard

System design and consumption

	LAYER	PRODUCT	CONSUMPTION (kg/m ²)	QS / FILLER (kg/m ²)	APPLICATION
1	Primer on strongly absorbent u. porous substrates, if necessary, 2-layer application *	CONIFLOOR EP 110 N / CONIFLOOR EP 115 N / CONIFLOOR EP 114 or others	0.3 – 0.5 * 2-layers if necessary or scratch coat	QS 03/08 0.8 – 1.0	Squeegee / roller / brush Sand broadcasting, not in excess
2.1	Scratch coat / levelling (optional)	CONIFLOOR EP 110 N / CONIFLOOR EP 115 N / CONIFLOOR EP 114 or others filled with QS 01/03	0.6 – 1.0 QS 01/03 MR ≤ 1:1	QS 03/08 2.0 – 3.0	Trowel / smoothing rake / notched trowel or squeegee Sand broadcasting, not in excess
2.2	Pore sealer / levelling layer (recommend)	CONIFLOOR PU 420	0.8 – 1.0	none	Trowel / smoothing rake / notched trowel or rake
3	Conductive layer with copper tape to earth point	CONIFLOOR EP 150 AS incl. copper tape for earthing	0.1 – 0.12	none	Earthing copper tape on scratch coat (grinded) below the conductive layer, measure conductive layer before apply next coating!
4	Tough-hard coating ** self-levelling, conductive, **not colour stable	CONIFLOOR PU 420 AS** (do not fill!)	2.2 – 2.5	none	Notched rubber squeegee / notched rubber rake on conductive layer, spike roller (metal) with conductive coatings mandatory!
	System layer thickness	ca. 2.0 – 3.0 mm			
	Subsoil	Surfaces must be clean, stable, and free of cracks and voids. In general, substrates must be provided in accordance with the applicable regulations. (See also "General processing guidelines for CONICA coatings, CONICA seals and CONICA parking deck coating systems"). Adhesive tensile strength ≥ 1.5 N / mm ² , max. Residual moisture ≤ 4% -CM, on cementitious substrates. Special precautions must be taken in the event of higher residual moisture levels and moisture by rising water. Preparation of the surface e.g. by grinding (diamond) or shot blasting (Blastrac) with subsequent sweeping and vacuuming is mandatory. The above-mentioned consumption values have been determined in the laboratory under practical conditions to achieve the technical properties. In the case of existing on-site conditions and conditions such as temperature, surface roughness etc., the consumption values may deviate from the stated values. In case of doubt, we recommend creating sample areas on site.			
	Note	For other substrates, which are not mentioned here or special requirements, special primers must be used if necessary, please ask our technical service. Detailed processing instructions can be found in the respective product data sheets or are available on request. Products printed in bold represent the tested system structure. CONICA synthetic resins are intended exclusively for commercial use! ** The yellowing occurring under the influence of UV light depends on the intensity and the colour; the yellowing does not negatively influence the technical properties!			
	**				

High Performance Flooring

Sport | Decorative | Industrial | Playground

Areas of application

- Production halls with EX protection requirements (ATEX)
- Technical rooms
- Warehouses and high bay shelving
- Problematic substrates such as Mastic asphalt (indoor)



System properties

- Very **low colour fastness!**
- **Conductive** according to EN 1081 and EN 61340-4-1 for EX protection areas
- R9 - R10 non-slip surfaces
- **Accessible with forklifts**, hand pallet trucks and similar
- Easy to clean, seamless and seamless surface
- **Very low emissions tested** according to TÜV Proficert, AgBB, M1, A+ and others
- Statically **crack bridging**
- Fire class **Bfl-s1**



Technical data (internal / external approvals)

PROPERTIES	STANDARD	VALUES
Statically crack bridging	EN 1062-7	Class A3 > 0.5 mm (achieved < 0,9 mm at 23°C)
Elongation at break (Coating)	DIN 53504	ca. 30 %
Shore-Hardness	DIN ISO 868	69 D after 28 d
Flexural strength	EN 196 / ASTM C109	ca. 28 N/mm ²
Compressive strength	EN 196 / ASTM C109	ca. 51 N/mm ²
Chemical resistance	EN ISO 2812-1	DiBT Test liquids 2, 3, 10, 11 other on request.
Impact strength	DIN EN 13813	≥ 4 Nm (IR4)
Abrasion resistance (Taber)	ISO 9352, ASTM D 1044	≤ 25 mg (incl. topcoat)
Abrasion resistance (BCA)	DIN EN 13813	AR ≤ 0,5
Slip resistance	DGUV guide line 108-003 / DIN 51130	Class R9 / R10 with SIC
Adhesive strength	DIN ISO 4624	≥ 1,5 N/mm ² (Depends on substrate)
Fire classification	EN 13501-1	B _{fl} -s1
Conductivity	EN 1081 EN 61340-4-1	R _g ≤ 10 ⁶ Ω R _g ≤ 10 ⁹ Ω
Low emission tested	AgBB / M1 / TÜV Proficert Interior Premium / MVV TB Annex 8 / ABG / BREEAM Exemplary Level / LEED v4 / CAM Italy / A+ and others	Very low emission

CONICA AG
Industriestrasse 26
8207 Schaffhausen/ Swiss
Tel. +41 (0)52 644 36 00
Fax +41 (0)52 644 36 99
info@conica.com
www.conica.com

The content of this information sheet is non-binding. With regard to the variety of surfaces and object conditions on the one hand, and on the other hand due to the fact that the application and processing of this product are beyond our control, the buyer and / or user is not released from the obligation to its own responsibility, to check and ensure, that this product is suitable for the intended use. Our verbal, written advice and tests is non-binding.

With the publication of this issue, all previous information on this system is no longer up to date. Since the data sheets are updated regularly, it is the responsibility of the user to have the current version available. Registered users can download current data sheets from our homepage at any time. We would be happy to send them to you on request.