


CONIFLOOR LPC+

(Living Polyurethane Comfort + Elastic mat)

Highly comfortable, very low-emission floor coating based on polyurethane resin with elastic SBR or foam mat, highly elastic, comfortable to walk with very high impact sound and walking noise reducing

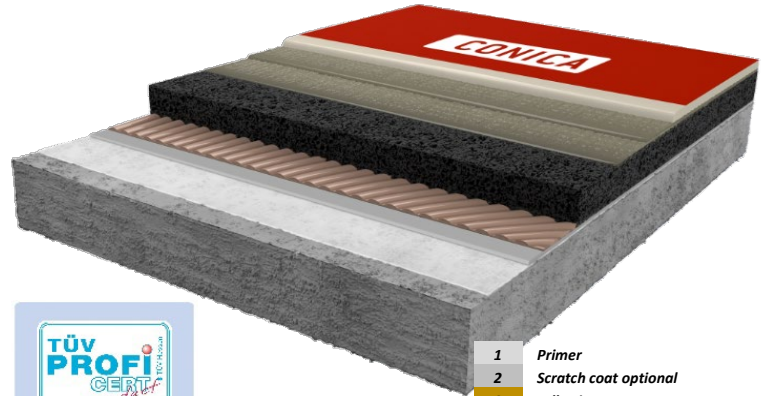

- 1 Primer
- 2 Scratch coat optional
- 3 Adhesive
- 4 SBR or foam mat
- 5 Pore sealer
- 6 Self-levelling coating elastic
- 7 Topcoat pigmented

System design and consumption

	LAYER	PRODUCT	CONSUMPTION (kg/m ²)	QS / FILLER (kg/m ²)	APPLICATION
1	Primer on strongly absorbent u. porous substrates, if necessary, 2-layer application *	CONIFLOOR EP 110 N / CONIFLOOR EP 712 N CONIFLOOR EP 716 N or others	0.3 – 0.5 * 2-layers if necessary or scratch coat	QS 03/08 0.8 – 1.0	Squeegee / roller / brush Sand broadcasting, not in excess
2.1	Scratch coat / levelling (optional)	CONIFLOOR EP 110 N / CONIFLOOR EP 712 N CONIFLOOR EP 716 N or others filled with QS 01/03	0.6 – 1.0 QS 01/03 MR ≤ 1:1	QS 03/08 2.0 – 3.0	Trowel / smoothing rake / notched trowel or squeegee Sand broadcasting, not in excess
3	Adhesive with elastic mat (SBR or foam mat)	CONIFLOOR PU 210 CONIFLOOR mat (G30), 4 or 6 mm Alternative CONIFLOOR mat. (F40), 4 or 6 mm	0.8 – 1.0 1.0 m ² 1.0 m ²	none	Notched trowel / notched squeegee / Mat are glued in fresh adhesive Leave no gap between the matt joints! after 30 – 60 minutes re-roll with floor roller 50 kg
4	Pore sealer, elastic	CONIFLOOR PU 340 FL	0.8 – 1.0	none	Trowel / smoothing trowel with rounded edges
5	2. pore sealer, fine levelling, elastic	CONIFLOOR PU 340 FL	0.5 – 0.7	none	Trowel / smoothing trowel with rounded edges
6	High elastic coating, self- levelling	CONIFLOOR PU 440/1	2.5 – 3.0	none	Notched spatula or trowel / notched squeegee / spike roller for de-aerating at cold conditions or if needed recommend
7	Top coat <u>pigmented</u>, matt or satin	CONIFLOOR PU 541/1 CW (ab) alternative CONIFLOOR PU 586 CW (S)	0.12 – 0.15 or (0.10 – 0.12)	optional CONIFLOOR Ballotini for slip resistance	Rollers, Microfibre roller (up to 11 mm) or with CONIFLOOR PU 586 CW with 8 mm or 6 mm micro mix fibre (orange)
	System layer thickness	ca. 6.0 – 8.0 mm			

Subsoil

Surfaces must be clean, stable, and free of cracks and voids. In general, substrates must be provided in accordance with the applicable regulations. (See also "General processing guidelines for CONICA coatings, CONICA seals and CONICA parking deck coating systems"). Adhesive tensile strength ≥ 1.5 N / mm², max. Residual moisture ≤ 4% -CM, on cementitious substrates. Special precautions must be taken in the event of higher residual moisture levels and moisture by rising water. Preparation of the surface e.g. by grinding (diamond) or shot blasting (Blastrac) with subsequent sweeping and vacuuming is mandatory. The above-mentioned consumption values have been determined in the laboratory under practical conditions to achieve the technical properties. In the case of existing on-site conditions and conditions such as temperature, surface roughness etc., the consumption values may deviate from the stated values. In case of doubt, we recommend creating sample areas on site.

Notes

For other substrates, which are not mentioned here or special requirements, special primers must be used if necessary, please ask our technical service. Detailed processing instructions can be found in the respective product data sheets or are available on request.
CONICA resins are intended for commercial use only!

Areas of application

- Hospitals, medical practices, Nursing homes
- Schools, kindergartens, universities, libraries
- Offices and public buildings
- Shops, restaurants, canteens
- Exhibition areas, entrance halls
- Private living areas

System properties

- **Very high** UV and colour resistance with pigmented aliphatic top coat
- Wide range of colours and for **individual design applications**
- **Very low emissions** tested according to AgBB, M1, A + and other standards
- **Reducing impact and walking noise** (18 - 20 dB)
- R9 - R11 non-slip surfaces
- **Comfortable** to walk and warm to feet
- **Hygienic**, joint and seamless surfaces easy to clean
- **Antistatic version** accord. EN 1815 (< 2kV) **possible**
- Statically **crack bridging**

Technical data (internal / external approvals)

PROPERTIES	STANDARD	VALUES
Statically crack bridging	EN 1062-7	Class A4 > 1.25 (achieved < 2.3 mm at 23°C)
Elongation at break (Coating)	DIN 53504	ca. 190 % (Coating) ca. 78 % (Pore sealer)
Tear resistance	DIN 53515	ca. 15 N/mm ²
Shore-hardness	DIN ISO 868	80 A after 28 d (Pore sealer + coating) Elastic mats depending on used product
Residual indentation behaviour	on basis of DIN EN ISO 24343-1	≤ 0.04 mm (25 MPa) ≤ 0.07 mm (50 MPa)
Impact sound reduction	ISO 10140-1	ca. 18 – 20 dB
Impact strength	EN 13813	≥ 6 Nm (IR6)
Abrasion resistance (Taber)	ISO 9352, ASTM D 1044	≤ 30 mg (incl. top coat)
Abrasion resistance (BCA)	DIN EN 13813	AR ≤ 0,5
Slip resistance	DGUV guide line 108-003 / DIN 51130	Class R9 / R10 / R11
Adhesive strength	DIN ISO 4624	≥ 1,5 N/mm ² (Depending on subsoil)
Fire classification	EN 13501-1	E _{fl} (for higher requirements use CONIFLOOR LPC+ FL)
Emission	AgBB / M1 / TÜV Proficert Premium	Very low emission (Components)

CONICA AG

Industriestrasse 26

8207 Schaffhausen/ Swiss

Tel. +41 (0)52 644 36 00

Fax +41 (0)52 644 36 99

info@conica.com

www.conica.com

The content of this information sheet is non-binding. With regard to the variety of surfaces and object conditions on the one hand, and on the other hand due to the fact that the application and processing of this product are beyond our control, the buyer and / or user is not released from the obligation to its own responsibility, to check and ensure, that this product is suitable for the intended use. Our verbal, written advice and tests is non-binding.

With the publication of this issue, all previous information on this system is no longer up to date. Since the data sheets are updated regularly, it is the responsibility of the user to have the current version available. Registered users can download current data sheets from our homepage at any time. We would be happy to send them to you on request.

